

65 WAY MODULO CONNECTOR		COMPONENT SIDE	
From: EXTERNAL MONITORING SELECTORS CF82E28			
To: MASTER MODULE SL651			
No	Description	No	Description
1	Not Used	34	St Cues Lamp
2	Not Used	35	Aux 2 Lamp
3	Not Used	36	ST3 Lamp
4	Not Used	37	Aux 3 Lamp
5	Not Used	38	Keyway
6	Not Used	39	Aux 4 Lamp
7	Not Used	40	ST1 Lamp
8	Not Used	41	ST5 Lamp
9	Not Used	42	Quad Disc Lamp
10	Not Used	43	ST4 Lamp
11	Not Used	44	Quad M/c 1 Lamp
12	Not Used	45	ST2 Lamp
13	Not Used	46	Quad M/c 2 Lamp
14	Not Used		Or QB to SLS Lamp
15	Not Used	47	Record Status (SLS)
16	Not Used		Or + 13v (Mon)
17	Not Used	48	Not Used
18	Not Used	49	Not Used
19	Not Used	50	Not Used
20	Not Used	51	Not Used
21	Not Used	52	Not Used
22	Not Used	53	Spare
23	Not Used	54	Not Used
24	Not Used	55	Not Used
25	Not Used	56	Not Used
26	Not Used	57	Not Used
27	Not Used	58	Not Used
28	Not Used	59	Not Used
29	Not Used	60	+13V
30	Not Used	61	Not Used
31	Not Used	62	Not Used
32	Not Used	63	Not Used
33	Aux 1 Lamp	64	Not Used
		65	Not Used

T82028.50
18 Jan 83

65 WAY MODULO CONNECTOR

From: EXTERNAL MONITORING SELECTORS CF82B28


To: MASTER MODULE SL651

CONNECTOR NO T82B28-A PRINTED CIRCUIT SIDE C-D VERSION

1	RB		33	Quad M/c 2 RB)
2	LB		34	Quad M/c 1 RB)
3	Quad Disc LB)		35	Quad Disc RB)
4	Quad M/c 1 LB)		36	Spare
5	Quad M/C 2 LB)		37	Spare
6	Quad M/c 2 RF)		38	Keyway
7	Quad M/c 1 RF)		39	NU
8	Quad M/c RF)		40	NU
9	ST5 R)		41	NU
10	ST4 R)		42	NU
11	ST3 R)		43	NU
12	ST2 R)		44	Spare
13	ST1 R)		45	Spare
14	RF		46	To CF8225 (+ve for Quad)
15	ST Cue R			(Monitor Only, SLS N/C)
16	Aux 1		47	Aux 3 Sw
17	Aux 2		48	Aux 4 Sw
18	Aux 3		49	ST1 Sw
19	Aux 4		50	ST2 S
20	Not Used		51	Aux 2 Sw
21	Not Used		52	Aux 1 Sw
22	Not Used		53	St Cues Sw
23	ST Cue L		54	Quad M/c 1 Sw
24	LF		55	Quad M/c 2 Sw
25	ST1 L)			OR QB to SLS Sw
26	ST2 L)		56	Quad Disc Sw
27	ST3 L)		57	ST5 Sw
28	ST4 L)	Inputs to	58	ST4 Sw
29	ST5 L)	FET's	59	ST3 Sw
30	Quad Disc LF)		60	+13v
31	Quad M/c 1 LF)		61	+20v
32	Quad M/c 2 LF)		62	-20v
33	)		63	Ov
			64	Ov
			65	Ov

T82B28.50
14 October 1983

TRAINING 10

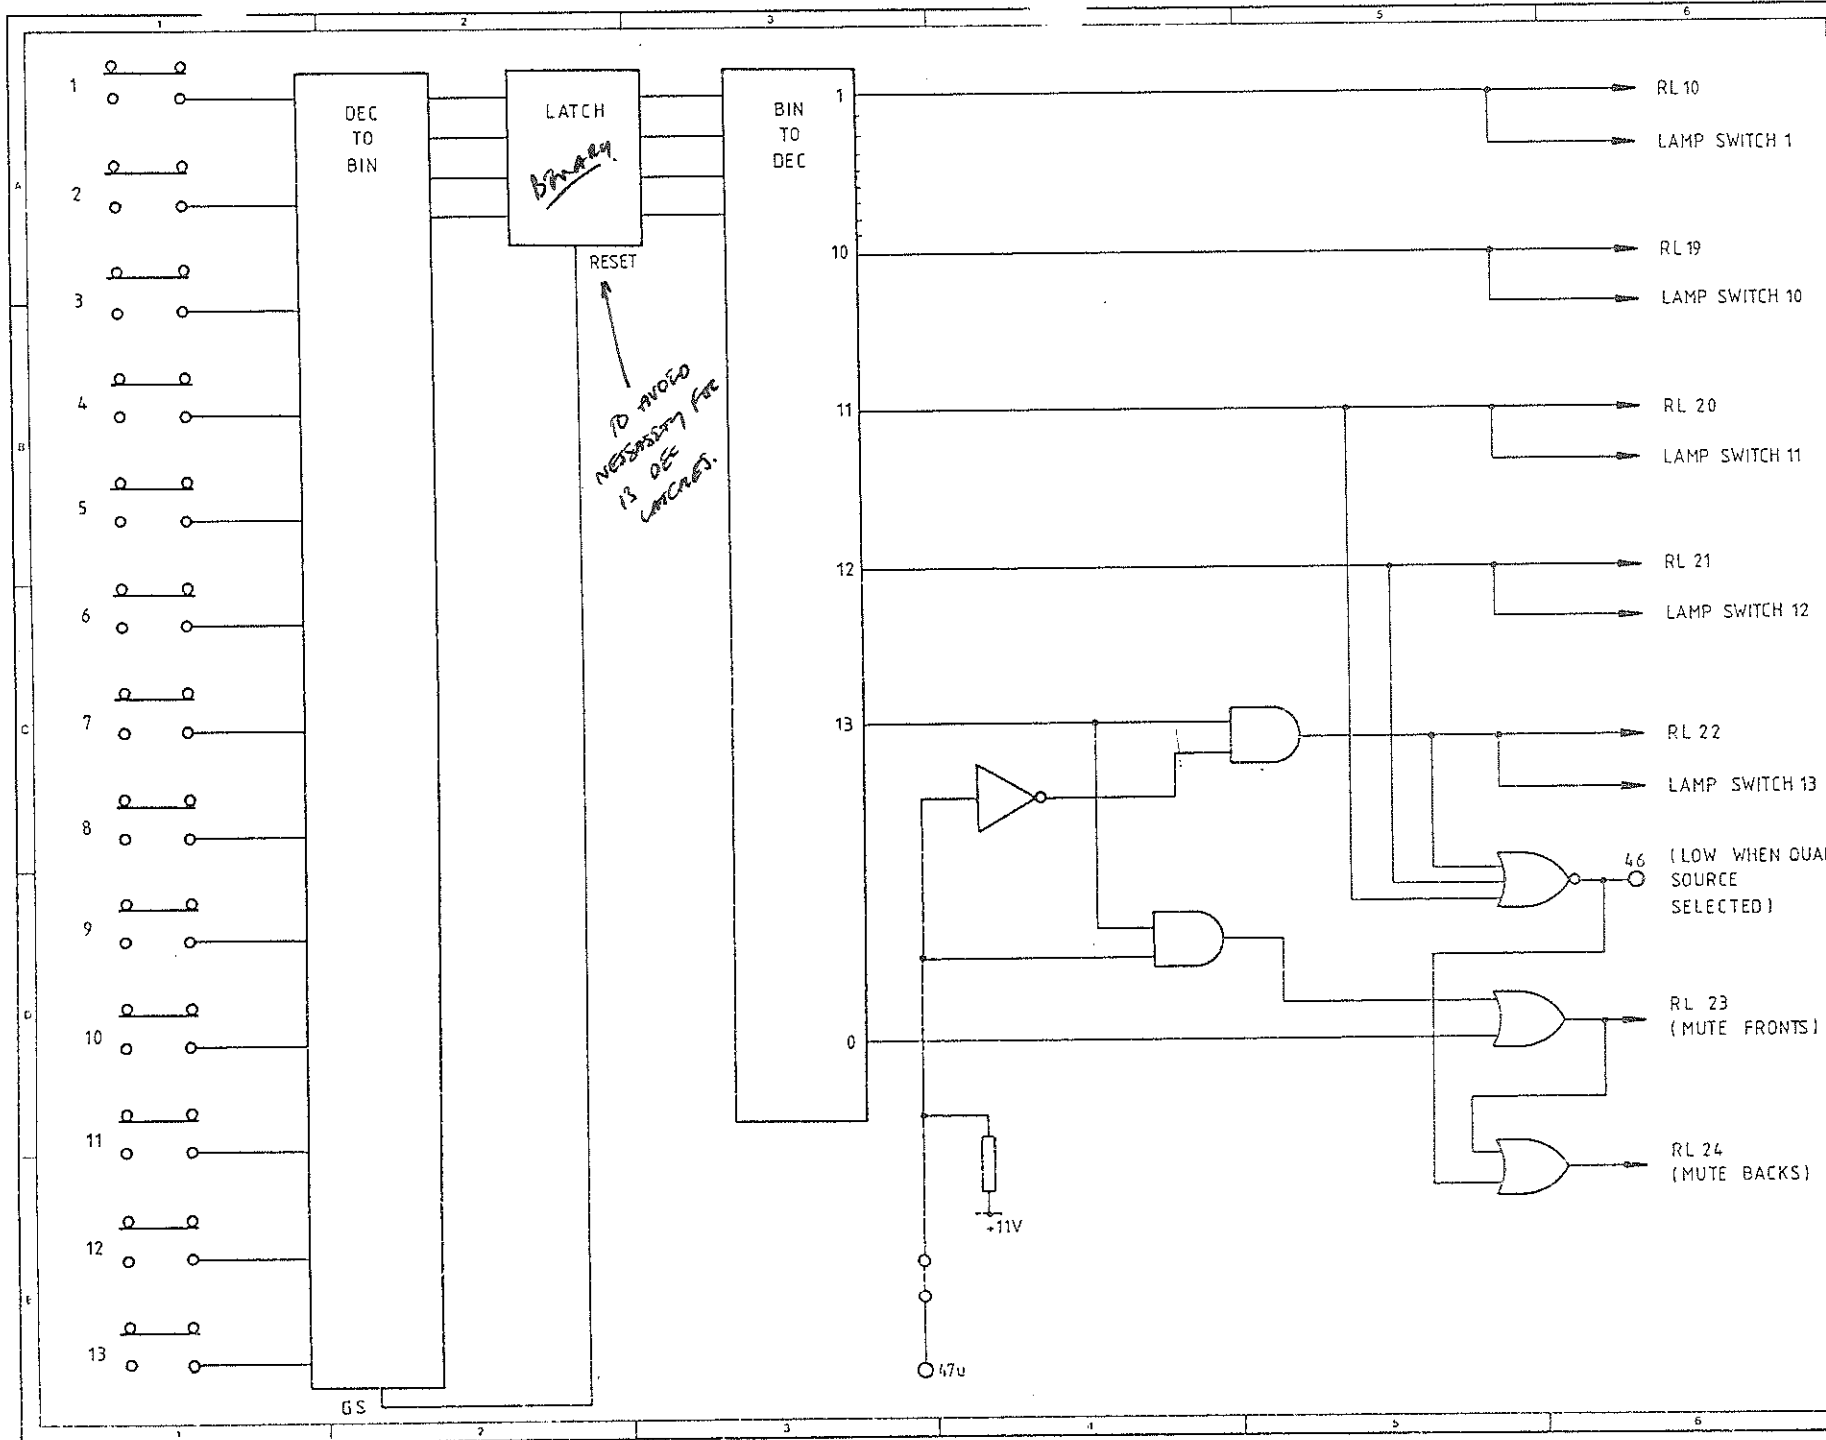

Copyright © SSL All rights reserved.
This document may not be reproduced in any form without the written permission of SSL.

Rev.	Date	Details
1	5.85	REDRAWN V.B.
2	OCT-85	RESISTOR ADDED
3	OCT-85	RESISTOR, RESET & 47u ADDED.

Title 82E28
SIMPLIFIED LOGIC

Drg.No. TRAINING 10

Solid State Logic
Stonesfield · Oxford · England

